



INSTRUCTIONS

StreetSmarts™

GE Lighting Systems, Inc.

CheckPoint Installation Instructions

Hendersonville, NC 28793-4506

READ THOROUGHLY BEFORE INSTALLING



WARNING

Risk of electric shock

- Turn power off before servicing
- see instructions

To install this CheckPoint you will need:

1. The CheckPoint.
2. An Installation Location Sheet to match the location and identification number of the pole with the CheckPoint that has been installed on it.



Pole ID

Option 1: Place
CheckPoint ID
Label

Option 2: Space to
write CheckPoint ID
(8 digit code)

Step by step instructions for CheckPoint Installation:

1. Remove CheckPoint from its packing carton.
2. On the Installation Location Sheet next to the appropriate luminaire, place the removable bar code sticker (found on the outside of CheckPoint plastic housing) or record the CheckPoint ID number by writing it in the space identified. The CheckPoint ID number is also found below the bar code on the bottom of the CheckPoint enclosure.

VERY IMPORTANT: DO NOT remove the permanent label on the bottom of the CheckPoint unit.



3. Cover the photo-controller to determine if luminaire, lamp and photo-controller are working properly. If they are not, please investigate, document and/or fix the issue before installing the CheckPoint.
4. Remove the photo-controller from the luminaire on which the CheckPoint is to be installed.
5. Place the photo-controller into the 3-prong receptacle on the top of the CheckPoint and turn clockwise to lock.
6. Place the CheckPoint, with the attached photo-controller, into the 3-prong photo-controller receptacle on the luminaire and twist clockwise to lock.
7. Cover the photo-controller and verify that the lamp arcs.
8. Return the Installation Location Sheets to the system administrator or the owner of the roadway light luminaires.

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to General Electric Company.



INSTRUCTIONS StreetSmarts™

GE Lighting Systems, Inc.

StreetSmarts™ Instalación del CheckPoint

Hendersonville, NC 28793-4506

IMPORTANTE - LEA ESTO ANTES DE INSTALAR


ADVERTENCIA

Riesgo de la descarga eléctrica

- Dé vuelta a la energía apagado antes de mantener
- vea las instrucciones

Para instalar este CheckPoint que usted necesitará:

1. El CheckPoint.
2. Una hoja del papel para registrar la localización y el número de identificación del poste y que el CheckPoint ha estado instalado en él.

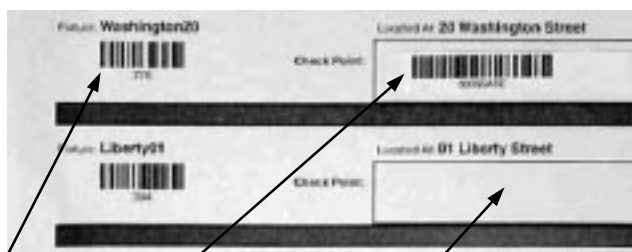

Identificación De Poste

Opción 1: Ponga La Etiqueta de la Identificación del CheckPoint

Opción 2: Espacio para escribir la Identificación del CheckPoint

Pasos para la instalación del CheckPoint:

1. Saque el CheckPoint de su cartón de embalaje.
2. En la hoja de localización de la luminaria, junto a la luminaria correspondiente, coloque la etiqueta adhesiva de códigos de barra (localizada en el contenedor de plástico del CheckPoint), o registre el número de identificación del CheckPoint escribiéndolo en el espacio correspondiente. El número de identificación del CheckPoint también se puede encontrar debajo del código de barras.

MUY IMPORTANTE: No quite la etiqueta permanente en el fondo del CheckPoint.



3. Una vez que el instalador se ha colocado a la altura de la luminaria con la grúa, cubra la fotocélula para determinar si la luminaria, la lámpara y la fotocélula están funcionando correctamente. Si no, investigue, documente y/o arregle el problema antes de instalar el CheckPoint.
4. Quite la fotocélula del luminaria en el cual el CheckPoint debe ser instalado.
5. Coloque la fotocélula en el receptáculo con tres conectores en la parte superior del CheckPoint y gire en el sentido del reloj para fijar.
6. Coloque el CheckPoint, con la fotocélula ya insertada, en la luminaria, y gire en el sentido del reloj para fijarlo.
7. Cubra la fotocélula y verifique que la lámpara funciona.
8. Devuelva las hojas de localización de la luminaria al administrador de sistemas ó al propietario de las luminarias.